



Graphic Pen Tablet

Star G540/G430

English, Русский язык, 日本語, 中文,
Deutsch, 한국어, Español, Français, Italiano

For Game osu!&Drawing

QUICK START GUIDE

Windows 10/8/7/Vista/XP Mac OS X 10.6.8 or above



XP-PEN

Web site: www.xp-pen.com
Mail: service@xp-pen.com


Please contact us with any questions



Designed by XPPEN Technology CO. in California, Assembled in China

Thank you for purchasing the XP-Pen tablet. Our product quick guide currently supports English, Russian, Japanese, German, Korean, Chinese, Italian, Spanish, and French. We apologize if your preferred language is not supported.

{Product and Accessories}



G430 Tablet



G540 Tablet



Battery-free Stylus



Nibs Bag




Quick Manual





10 Replacement Nibs

{Product Overview:}

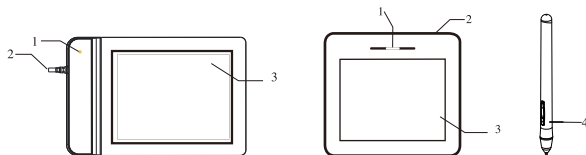


- (1). Status indicator light
- (2). USB Cable
- (3). Working area
- (4). Stylus

{Working Area}



{Replacing the Stylus' pen tip}

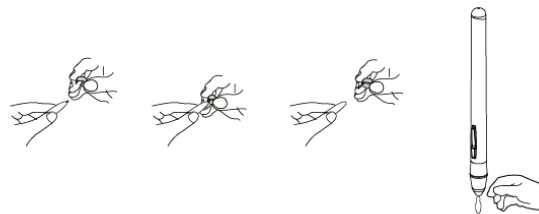

{Installing the driver}

1. Before installing the driver, please uninstall and completely remove any driver you have for other graphics tablet on your computer; restart your computer after driver(s) have been uninstalled/removed

Advised – making sure that all hidden files are removed

Windows: Go to Device Manager and click "Show Hidden Devices" and remove other tablets and all non-used/unused devices you have on your computer

Mac: Delete folder(s) associated to the developer of the driver (which you uninstalled) in Application Support and System Library Folder

Remove Wacom hidden files - <http://www.xp-pen.com/ask/index/id/66.html> (first one)

2. Close down any programmes you don't need running on your computer before starting installation
3. Disable any anti-virus protection program such as Firewall
4. Make sure that you are installing the driver as the Administrator
5. Connect the tablet to your computer before installation
6. Go to <http://www.xp-pen.com/download/index/cid/5.html> to download the latest driver
7. Unzip downloaded file to desktop
8. Open the new unzipped folder
9. Click Setup.exe and follow onscreen instructions
10. After installation go to tablet settings > "Tablet1" tab > make sure "support tablet PC" is not selected

{FAQ}

IMPORTANT: For a full and updated list of FAQ, please visit: <http://www.xp-pen.com/ask/index/id/66.html>

1. How do I know if the tablet is working?

If you can use the pen like a mouse (the cursor is tracking your pen movement on the tablet), then it is working.

2. Pressure sensitivity is not working

You will need to:

> Go to your tablet settings/options > Click on the "Pressure Sensitivity" tab
> Check if pressure sensitivity can be detected on there:

If pressure sensitivity is working on tablet setting, that means the tablet is not faulty, you will need to contact the support team of the software you are using. You can also pop us an email alerting us of any potential compatibility issue (Also please go to FAQ .)

If the pressure sensitivity is not working on tablet setting, you will need to reinstall your driver

3. Pressure sensitivity not working for specific software:

- > Run the tablet software as Administrator
- > Update your drawing software to the latest version if possible
- > Run your drawing software as Administrator
- > Close down any programmes you don't need running on your computer
- > It is optimal to have only 1 drawing software running at a time
- > Unplug your mouse

If you have any questions, please contact us at:

Skype: XP-Pen

Web: www.xp-pen.com

Email: service@xp-pen.com